

518029

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
9 December 2004 (09.12.2004)


PCT

(10) International Publication Number
WO 2004/106820 A1

- (51) International Patent Classification⁷: **F25B 49/02**,
F04B 49/06, 39/02
- (21) International Application Number:
PCT/JP2004/007297
- (22) International Filing Date: 21 May 2004 (21.05.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
2003-150665 28 May 2003 (28.05.2003) JP
- (71) Applicant (for all designated States except US): MAT-
SUSHITA ELECTRIC INDUSTRIAL CO., LTD.
[JP/JP]; 1006, Oaza Kadoma, Kadoma-shi, Osaka
5718501 (JP).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): UMEOKA, Iku-
tomo. KATAYAMA, Makoto. YABIKI, Junichiro.
- (74) Agents: IWAHASHI, Fumio et al.; c/o Matsushita Elec-
tric Industrial Co., Ltd., 1006, Oaza Kadoma, Kadoma-shi,
Osaka 5718501 (JP).
- (81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG,
KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG,
MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH,
PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: METHOD OF CONTROLLING COMPRESSOR AND CONTROLLER

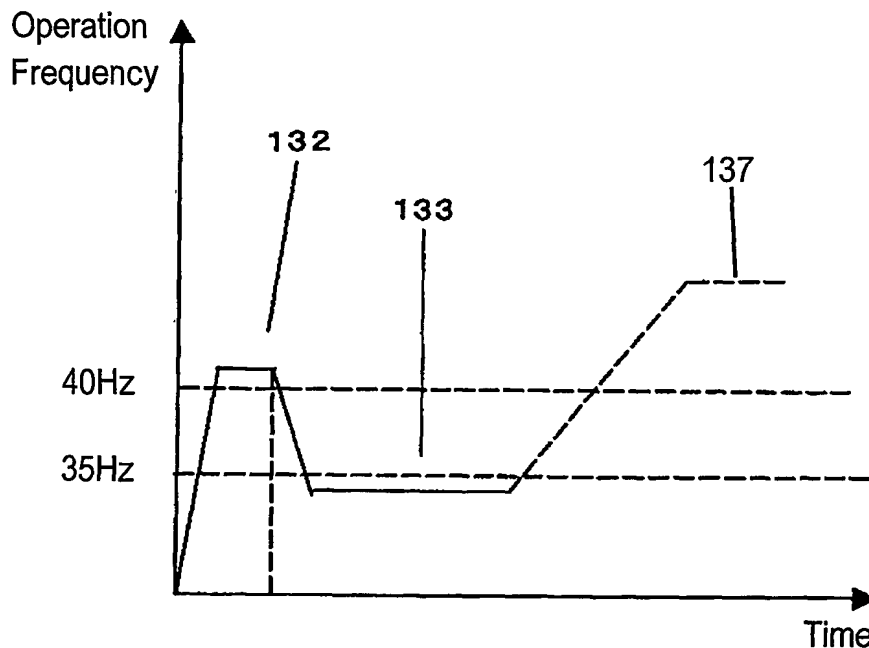

(57) Abstract: A compressor is operable to compress refrigerant at a variable operation frequency. According to a method of controlling the compressor, the compressor starts operating, and just after that, the compressor operates at a first frequency for a first period of time. Just after that, the compressor operates at a second frequency lower than the first frequency for a second period of time longer than the first period, and after that, the compressor operates at an ordinary operation. This method does not cause the compressor to generate an abnormal noise or obstruction to lubrication.

WO 2004/106820 A1

DESCRIPTION

Method of Controlling Compressor and Controller

5

Technical Field

The present invention relates to a method of refrigerant compressor used in refrigerating devices, such as a refrigerator, an air-conditioner, and a refrigerator with a freezer, and to a controller for controlling the compressor.

10

Background Art

Compressors of refrigerating devices, such as a domestic refrigerator with a freezer, recently employ hydrocarbon refrigerant, such as R600a, which is a natural refrigerant having an ozone depleting coefficient of zero and a small global warming coefficient.

15

A conventional compressor disclosed in Japanese Patent Laid-Open Publication No.11-311457 rotates at a low frequency at its start at a low ambient temperature, at which a large amount of refrigerant dissolves in lubricant. At the start, the lubricant is discharged while bubbles generated by vaporization of the refrigerant are sucked. When the compressor rotates at a constant frequency, a discharged amount of the lubricant decreases. As a result, an amount of the lubricant in the compressor is maintained, and this prevents lack of the lubrication supplied to sliding components.

20

A controller of controlling the conventional compressor will be described hereinafter. Fig. 10 is a sectional view of a conventional refrigerator. Fig. 11 shows a refrigerating cycle of the conventional refrigerator. Fig. 12 is an electrical schematic diagram of the conventional

25

refrigerator. Fig. 13 shows a change of an operating frequency of the conventional compressor.

As shown in Fig. 10, reciprocating compressor 10 is placed at the lower and rear section in refrigerator 1. The reciprocating compressor includes lubricant, motor 11, and a mechanism driven by motor 11. Those elements are accommodated in an airtight container. Compressor 10 includes a lubricating mechanism (not shown) formed of a centrifugal pump therein. The airtight container accommodates compressor motor 11, a crank mechanism (not shown), and a piston (not shown). A rotary shaft of motor 11 is linked to the piston via the crank mechanism which converts a torque of motor 11 into a linear reciprocating force and transmits the force to the piston. Refrigerant in the airtight container is compressed by the reciprocating force of the piston.

As shown in Fig. 11, compressor 10 is coupled to condenser 13 via pipe 12a. Condenser 13 is coupled to capillary tube 14 via pipe 12b. Capillary tube 14 is coupled to evaporator 15 via pipe 12c. Evaporator 15 is coupled to a suction inlet of compressor 10 via pipe 12d. The foregoing structure forms refrigerating cycle 16 having refrigerant sealed therein.

As shown in Fig. 12, motor 11 is a three-phase DC brush-less motor including a stator formed of a stator core having coils 11a of phases U, V and W wound around the core, and a rotor formed of a rotor core and permanent magnets rigidly mounted to the rotor core. Motor 11 is coupled to inverter 18 shown in Fig. 12.

Inverter 18 includes main controller 22 implemented mainly by a micro-computer. Main controller 22 determines an operating frequency of motor 11 in response to an electrical signal corresponding to room temperature T. The electrical signal is supplied from room-temperature

sensor 28, such as a thermister, placed at refrigerator 1.

An operation of the controller of the refrigerant compressor will be described hereinafter. Upon inverter 18 outputting a power at a predetermined frequency to motor 11, compressor 10 compresses the refrigerant, then the refrigerant discharged from compressor 10 circulates through condenser 13, capillary tube 14, and evaporator 15 in this order.

A large amount of refrigerant generally dissolves into lubricant in compressor 10 at a low ambient temperature. At this moment, if compressor 10 is activated at a high frequency, the dissolving refrigerant evaporates at once, thereby producing bubbles intensely.

In order to prevent the bubbles from being produced, when main controller 22 of inverter 18 detects the relation of reference temperature $T_0 \geq$ ambient temperature T , the controller raises the frequency of the power applied to motor 11 from 0Hz (the motor halts) to 30Hz, which is a minimum frequency, within about 3 seconds, then holds the frequency at 30Hz. This operation allows the refrigerant dissolving in the lubricant to evaporate gradually, hence preventing the bubbles from being intensely produced. Then, the lubricant is prevented from being discharged from compressor 10 together with the refrigerant, and the lack of lubrication can be prevented.

However, when compressor 10 operates at the minimum frequency (30Hz) at a low ambient temperature, in the conventional controller, the refrigerant dissolving in the lubricant evaporate little. Therefore, at low ambient temperature at which the large amount of the refrigerant dissolves in the lubricant, when the compressor operates from the frequency of 30Hz to an ordinary operation at a high rotation speed, a large amount of the refrigerant evaporates at once, hence producing the bubbles intensely. Compressor 10 then compresses the refrigerant together with the bubbles

including a large amount of lubricant, thereby generating an abnormal noise. Simultaneously to this, an amount of lubricant is discharged from compressor 10, and then, a lack of lubrication and an obstacle to lubrication occur in compressor 10.

5 It has taken a long period of time for the refrigerant to dissolve in the lubricant. Therefore, the above phenomenon often occurs at an initial starting, i.e., when a refrigerating device is energized for the first time. This phenomenon often occurs at a start after a defrosting operation since the refrigerant in condensed form returns into compressor 10 from
10 evaporator 15.

For a combination of hydrocarbon refrigerant, such as R600a, recently introduced and lubricant made from mineral oil, a saturation solubility of the refrigerant to the lubricant depends extremely on a pressure. At the start of the compressor, the pressure in the airtight container is reduced,
15 hence producing the bubble intensely.

Summary of the Invention

A compressor is operable to compress refrigerant at a variable operation frequency. According to a method of controlling the compressor,
20 the compressor starts operating, and just after that, the compressor operates at a first frequency for a first period of time. Just after that, the compressor operates at a second frequency lower than the first frequency for a second period of time longer than the first period of time, and after that, the compressor operates at an ordinary operation.

25 This method does not cause the compressor to generate an abnormal noise or obstruction to lubrication.

Brief Description of Drawings

Fig. 1 is a vertical sectional view of a refrigerant compressor in accordance with Exemplary Embodiments 1 to 3 of the present invention.

Fig. 2 is a top view of a rotor of the compressor in accordance with
5 Embodiments 1 to 3.

Fig. 3 is a top view of a stator of the compressor in accordance with Embodiments 1 to 3.

Fig. 4 is an operation controller of the compressor in accordance with Embodiments 1 to 3.

10 Fig. 5 shows operating frequencies at a start of the compressor in accordance with Embodiment 1.

Fig. 6 shows a bubble phenomenon at the start of the compressor in accordance with Embodiments 1 to 3.

Fig. 7 shows operating frequencies at a start of the refrigerant
15 compressor in accordance with Embodiment 2.

Fig. 8 shows operating frequencies at a start of the refrigerant compressor in accordance with Embodiment 3.

Fig. 9A shows a sectional view of a refrigerating device in accordance with Exemplary Embodiment of the invention.

20 Fig. 9B shows a refrigerating cycle of the refrigerating device in accordance with Embodiment 4.

Fig. 10 shows a sectional view of a conventional refrigerator.

Fig. 11 shows a conventional refrigerating cycle.

Fig. 12 shows an electrical schematic diagram of the conventional
25 refrigerator.

Fig. 13 shows operating frequencies of a conventional compressor.

Detailed Description of the Preferred Embodiments

Exemplary Embodiment 1

Fig. 1 shows a vertical sectional view of a refrigerant compressor in accordance with Exemplary Embodiments 1 to 3 of the present invention.

5 Refrigerant compressor 99 which can operate at a variable operation frequency contains hydrocarbon refrigerant, such as R600a, which does not include chlorine or fluorine. Airtight container 101 accommodates motor element 104 formed of stator 102 and rotor 103, and compressor element 105 driven by motor element 104.

10 Airtight container 101 stores lubricant 106 made from mineral oil which is highly soluble with the refrigerant. Crankshaft 107 includes a lubricating mechanism (not shown) therein. Crankshaft 107 includes main shaft 108 having rotor 103 press-fixed thereto and eccentric section 109 formed eccentrically with respect to main shaft 108. Crankshaft 107 is
15 supported by cylinder block 110.

Cylinder block 110 forms compressing chamber 111 having substantially a cylindrical shape, and includes bearing 112 supporting main shaft 108. Piston 113 is inserted into compressing chamber 111 and can reciprocate in chamber 111. Piston 113 is coupled to eccentric section 109
20 via linking unit 114 and piston 115.

A suction pipe (not shown) is fixed to airtight container 101 and coupled to a lower pressure side (not shown) of a refrigerating system, thereby guiding the refrigerant into container 101. Suction muffler 116 has an end communicating with compressing chamber 111 via suction port 117.
25 Suction inlet 118 opens in container 101 and fixed by being sandwiched between bulb-plate 119 and cylinder heat 120.

Fig. 2 shows a top view of rotor 103 of compressor 99, and Fig. 3 shows

a top view of stator 102 of compressor 99. Rotor 103 includes rotor core 121, cylindrical pipes 122, and permanent magnets 123 embedded between core 121 and pipes 122. A lid (not shown) is fixed to core 121 with rivets 124. Coil wires 127 are wound directly on teeth 126 of core 125, thereby providing
5 stator 102. Lubricant 106 lubricates the foregoing elements of the compressor.

Fig. 4 shows controller 128 of compressor 99. Compressor 99 is coupled to power supply 129 via controller 128 including driving section 130 and controlling section 131. Driving section 130 drives motor element 104
10 of compressor 99, and controlling section 131 controls driving section 130, thereby controlling motor element 104 of compressor 99.

Controller 128 controls an operation frequency of the compressor, as shown in Fig. 5 before an ordinary operation in which the compressor for compressing the refrigerant in the refrigerating device operates ordinarily,
15 for example, when the refrigerating device is connected to a commercial power supply or when the refrigerating device is turned on for the first time after a defrosting operation. Compressor 99 is driven at a high speed at a frequency over 40Hz at first within two seconds (high-speed operation 132). Then, the compressor is driven at a lower speed at a frequency not higher
20 than 35Hz (low-speed operation 133). A cycle consisting of the high-speed operation and the low-speed operation is repeated again, then controller 128 has compressor 99 operate at a rated operation frequency (rated operation 137, i.e., ordinary operation 137). At the start of the compressor, the refrigerating device is connected to the commercial power supply. Even if a
25 large amount of the refrigerant dissolves into the lubricant in the compressor, the high-speed operation allows the refrigerant dissolving in the lubricant to evaporate, thereby preventing suction of bubbles. At another start of the

compressor, i.e. the compressor is turned on for the first time after a defrosting operation, a large amount of liquid refrigerant returns from the refrigerating device to the compressor. Even if a large amount of the refrigerant dissolves in the lubricant, the high-speed operation allows the refrigerant dissolving in the lubricant to evaporate, thereby preventing the compressing chamber from having the bubbles sucked into it.

Motor element 104, upon receiving a current, activates compressor 99. Rotor 103 rotates crankshaft 107, and motion of eccentric section 109 is transmitted to piston 113 via linking unit 114, thereby having piston 113 reciprocate in compressing chamber 111. The refrigerant guided into airtight container 101 through the suction pipe is sucked with suction muffler 116. Then, a suction reed (not shown) opens to allow the refrigerant to flow through suction port 117. Then, the refrigerant is guided into compressing chamber 111 and is compressed continuously.

Just after compressor 99 starts operating at the frequency over 40Hz (high-speed operation 132), a pressure in airtight container 101 is reduced. Further, lubricant 106 is agitated, which allows the refrigerant dissolving in lubricant 106 to evaporate, and bubbles 134 are produced, as shown in Fig. 6.

The refrigerant is hydrocarbon refrigerant excluding chlorine and fluorine, and lubricant 106 is made from mineral oil which is mutually soluble with the refrigerant. For a combination of this refrigerant and this lubricant, a saturation soluble amount of the refrigerator into lubricant 106 decreases rapidly according to decreasing of the pressure, so that the refrigerant evaporates intensely at once to produce the bubbles.

Since high-speed operation 132 is performed for a period of time limited within 2 seconds, controller 128 then drives compressor 99 at a frequency not higher than 35Hz (change to low-speed operation 133) before bubbles 134

reach suction inlet 118 of suction muffler 116. The period of time of 2 seconds is the maximum allowable period of time before bubbles 134 reach suction inlet 118 at the fastest rising speed in the case of producing the most intense bubbles.

5 In other words, before bubbles 134 is sucked by suction muffler 116, controller 128 changes the operation of compressor 99 to low-speed operation 133 at a frequency not higher than 35Hz. At low-speed operation 133, the pressure is reduced moderately, and lubricant 106 is not agitated so much, hence having bubbles 134 fall but not rise.

10 The cycle consisting of high-speed operation 132 and low-speed operation 133 is repeated before the ordinary operation, so that the refrigerant dissolving in lubricant 106 evaporates before bubbles 134 are sucked into compressing chamber 111, and the bubble phenomenon is suppressed to a small scale. Then, bubbles 134 fall, and then, compressor
15 99 is switched to operate at low-speed operation 133.

 The refrigerant in lubricant 106 produces the bubbles and evaporates at high-speed operation 132, hence preventing an abnormal noise due to the compression of the lubricant. As a result, lubricant 106 is discharged little, so that an obstruction to lubrication caused by the lower oil surface can be
20 prevented.

 At low-speed operation 133, compressor 99 may stop, i.e. at an operating frequency of 0Hz, hence minimizing the bubbles.

 Suction inlet 108 provided at suction muffler 116 and opening into airtight container 101 allows bubbles 134 not to be guided directly to
25 compressing chamber 111, but to be guided to chamber 111 through suction inlet 118 and suction muffler 116. Therefore, even if bubbles 134 are sucked into inlet 118, isolation of the lubricant and heat exchange in muffler 116

facilitates the evaporation of the refrigerant, hence suppressing the suction of foams 134 into chamber 111.

Motor element 104 includes rotor 103 having permanent magnets 123, and stator 102 having coil wires 127 wound directly on teeth 126 of stator core 125. Motor element 104 allows core 125 to be thin, and allows airtight container 101 to be small. As a result, the amount of lubricant 106 stored in container 101 is smaller by 25% than that in a motor element using a distributed winding. This reduction allows an amount of refrigerant dissolving in lubricant 106 to be smaller proportionately, thereby suppressing the bubbles.

Exemplary Embodiment 2

Fig. 7 shows operating frequencies at the start of a refrigerant compressor in accordance with Exemplary Embodiment 2 of the present invention. Similar elements to those of Embodiment 1 are denoted by the same reference numerals as those of Embodiment 1, and their detailed descriptions thereof are omitted here. As shown in Fig. 7, controller 128 drives refrigerant compressor 99 at frequency Fa (high-speed operation 132) before an ordinary operation in which the compressor for compressing refrigerant in a refrigerating device operates ordinarily, for example, when the refrigerating device is connected to a commercial power supply or when the device is turned on for the first time after a defrosting operation. Then controller 128 drives compressor 99 to operate at frequency Fb (low-speed operation 133) lower than frequency Fa. A cycle consisting of high-speed operation 132 and low-speed operation 133 is repeated plural times.

During high-speed operation 132a at frequency Fa, bubbles 134 are produced; however, the production of foams 134 is suppressed during low-

speed operation 133a at frequency Fb. After low-speed operation 133a for period T1 of time, controller 128 drives compressor 99 to operate at frequency Fa (high-speed operation 132b). High-speed operation 132b allows the refrigerant still dissolving in lubricant 106 to evaporate.

5 Then, controller 128 drives compressor 99 to operate at frequency Fb (low-speed operation 133b) for period T2 of time shorter than period T1, so that the production of bubbles 134 is suppressed. The amount of bubbles 134 at low-speed operation 133b is less than the amount of bubbles 134 at low-speed operation 133a, hence allowing period T2 to be shorter than period
10 T1 to suppress the production of bubbles 134.

 Then, controller 128 drives compressor 99 to operate at frequency Fa (high-speed operation 132c), thereby allowing the refrigerant still remaining in lubricant 106 to evaporate completely. Then, controller 128 drives compressor 99 to operate at frequency Fb (low-speed operation 133c) for
15 period T3 of time shorter than period T1 and period T2. Since high-speed operation 132c produces a fewer amount of bubbles 134, low-speed operation 133c for period T3 shorter than period T1 and period T2 is enough to suppress the production of bubbles 134.

 If periods T1-T3 are shortened step by step, respective periods of low-speed operations 133a-133c can be shortened. As a result, the proportions
20 of high-speed operations 132a-132c becomes greater, hence allowing the lubricant to be supplied to sliding components.

 Compressor 99 operates at frequency Fa throughout high-speed operations 132a-132c. However, as long as frequency Fa is higher than
25 frequency Fb at low-speed operations 133a-133c, and as long as operation periods of the high-speed operations are longer than periods T1-T3 of low-speed operations, effects similar to above are expected. At low-speed

operations 133a-133c, the compressor may not be driven necessarily at common frequency F_b , but may be driven at respective frequencies at low-speed operations 133a-133c different from each other as long as the frequencies are lower than respective frequencies at high-speed operations
5 132a-132c.

Exemplary Embodiment 3

Fig. 8 shows operating frequencies used at the start of a refrigerant compressor in accordance with Exemplary Embodiment 3 of the present
10 invention. Similar elements to those of Embodiment 1 are denoted by the same reference numerals as those of Embodiment 1, and detailed descriptions thereof are omitted.

As shown in Fig. 8, controller 128 drives refrigerant compressor 99 to operate at frequencies F_1 - F_4 before an ordinary operation in which the
15 compressor for compressing refrigerant in a refrigerating device operates ordinarily, for example, when the refrigerating device is connected to a commercial power supply or when the device is turned on for the first time after a defrosting operation. First, controller 128 drives compressor 99 to operate at frequency F_1 (high-speed operation 135a), and then drive the
20 compressor to operate at frequency F_4 (low-speed operation 136a) lower than frequency F_1 . During high-speed operation 135a, bubbles 134 are produced. However the production of bubbles 134 is suppressed during low-speed operation 136a.

Then, controller 128 drives compressor 99 to operate at frequency F_2
25 (high-speed operation 135b) higher than frequency F_1 , so that refrigerant still dissolving in lubricant 106 evaporates due to agitation and lowering of pressure. Then, controller 128 drives compressor 99 to operate at frequency

F4 (low-speed operation 136b). The amount of bubbles 134 produced during low-speed operation 136b is smaller than that during high-speed operation 135a, so that the production of bubbles 134 can be sufficiently suppressed during low-speed operation 136b.

5 Next, controller 128 drives compressor 99 to operate at frequency F3 (high-speed operation 135c) higher than frequency F2, thereby allowing the refrigerant still in lubricant 106 to evaporate completely. Then, controller 128 drives compressor 99 to operate at frequency F4 (low-speed operation 136c). The amount of bubbles 134 produced during high-speed operation 10 135c is smaller than that produced during high-speed operation 135b, so that the production of bubbles 134 can be sufficiently suppressed during low-speed operation 136c. Since an average frequency at high-speed operations 135a-135c becomes higher, the lubricant is supplied stably to sliding components.

15 Exemplary Embodiment 4

Fig. 9A is a sectional view of a refrigerating device including a refrigerant compressor and a controller in accordance with Exemplary Embodiment 4 of the present invention. Similar elements to those of 20 Embodiment 1 are denoted by the same reference numerals as those of Embodiment 1, and detailed descriptions thereof are omitted. Refrigerating device 139 includes storage compartment 141 surrounded by heat insulator 140, refrigerant compressor 99 placed at the bottom of the device, a condenser, a decompressor, and evaporator 144..

25 Fig. 9B shows a refrigerating cycle of the refrigerating device of Embodiment 4. Compressor 99, condenser 150, decompressor 151, and evaporator 144 are coupled to provide the refrigerating cycle. As shown in

Fig. 1, compressor 99 includes lubricant 106, motor element 104 including stator 102 and rotor 103, and compressor element 105 in airtight container 101. Motor element 104 is controlled and driven by controller 128 according to Embodiment 1 shown in Fig. 1.

5 Compressor 99 prevents compressing chamber 111 from sucking bubbles 134 into the chamber, and allows refrigerant dissolving in lubricant 106 to evaporate sufficiently, thereby supplying the lubricant adequately to sliding components.

At each of high-speed operations 135a-135c, the compressor may
10 operate for different periods of time. At each of low-speed operations 136a-136c, the compressor may operate not necessarily at common frequency F4. As long as respective frequencies of the low-speed operations are lower than frequencies F1-F3 of high-speed operations 135a-135c, the frequencies of the low-speed operation may be different from each other.

15 According to Embodiments 1 to 4, compressor 99 is the reciprocating compressor including the airtight container have a low pressure therein is described. However, compressor 99 may be a compressor other than the reciprocating compressor, i.e., a compressor including an airtight container having a high pressure therein, and the methods according to Embodiment 1
20 to 3 suppress bubbles produced in lubricant.

Industrial Applicability

A method of controlling a compressor for compressing refrigerant at a variable operation frequency according to the present invention prevents an
25 abnormal noise and an obstruction to lubrication.

CLAIMS

1. A method of controlling a compressor operable to compress refrigerant at a variable operation frequency, said method comprising the steps of:

- 5 (a) allowing the compressor to start operating;
- (b) allowing the compressor to operate at a first frequency for a first period of time just after said step (a);
- (c) allowing the compressor to operate at a second frequency lower than the first frequency for a second period of time longer than the first
- 10 period just after said step (b); and
- (d) allowing the compressor to operate at an ordinary operation after said step (c).

2. The method of claim 1, further comprising the steps of:

- 15 (e) allowing the compressor to operate at a third frequency higher than the second frequency for a third period of time shorter than the second period just after said step (c); and
- (f) allowing the compressor to operate at a fourth frequency lower than the first frequency and the third frequency for a fourth period of time
- 20 longer than the first period and the third period just after said step (e).

3. The method of claim 2, wherein the first frequency is equal to the third frequency.

25 4. The method of claim 2, wherein the second frequency is equal to the fourth frequency.

5. The method of claim 2, wherein the first period is equal to the third period.

6. The method of claim 2, wherein the second period is equal to the
5 fourth period.

7. The method of claim 2, wherein the fourth period is shorter than the second period.

10 8. The method of claim 2, wherein the third frequency is higher than the first frequency.

9. The method of claim 2, wherein the third period is not longer than two seconds.

15

10. The method of claim 2, wherein the third frequency is not lower than 40Hz.

11. The method of claim 2, wherein the fourth frequency is not higher
20 than 35Hz.

12. The method of claim 1, wherein the first period is not longer than two seconds.

25 13. The method of claim 1, wherein the first frequency is not lower than 40Hz.

14. The method of claim 1, wherein the second frequency is not higher than 35Hz.

15. The method of claim 1,

5 wherein the compressor is operable to contain lubricant and the refrigerant, and

 wherein the refrigerant is hydrocarbon refrigerant excluding chlorine and fluorine, and the lubricant and the refrigerant are mutually soluble with each other.

10 16. A controller for controlling a compressor including

 a compressing element operable to compress refrigerant, and

 a motor element operable to drive the compressing element to operate at a variable operation frequency,

15 said controller comprising:

 a driving section for driving the motor element; and

 a controlling section for controlling the driving section, the controlling section being operable

 (a) to allow the compressor to start operating,

20 (b) to allow the compressor to operate at a first frequency for a first period of time just after said (a) to allowing the compressor to start operating,

 (c) to allow the compressor to operate at a second frequency lower than the first frequency for a second period of time longer than the first period just after said (b) to allow the compressor to operate at
25 the first frequency for the first period, and

 (d) to allow the compressor to operate at an ordinary

operation after said (c) to allow the compressor to operate at the second frequency for the second period.

17. The controller of claim 16, wherein the controlling section is
5 operable to the driving section, the controlling section being operable

(e) to allow the compressor to operate at a third frequency higher than the second frequency for a third period of time shorter than the second period just after said (c) to allow the compressor to operate at the second frequency for the second period, and

10 (f) to allow the compressor to operate at a fourth frequency lower than the first frequency and the third frequency for a fourth period of time longer than the first period and the third period just after said (e) to allow the compressor to operate at the third frequency for the third period.

15 18. The controller of claim 17, wherein the first frequency is equal to the third frequency.

19. The controller of claim 17, wherein the second frequency is equal to the fourth frequency.

20 20. The controller of claim 17, wherein the first period is equal to the third period.

21. The controller of claim 17, wherein the second period is equal to
25 the fourth period.

22. The controller of claim 17, wherein the fourth period is shorter

than the second period.

23. The controller of claim 17, wherein the third frequency is higher than the first frequency.

5

24. The controller of claim 16,
wherein the compressing element is operable to contain lubricant and the refrigerant, and

wherein the refrigerant is hydrocarbon refrigerant excluding
10 chlorine and fluorine, and the lubricant and the refrigerant are mutually soluble with each other.

25. A compressor comprising:

an airtight container for accommodating refrigerant and
15 lubricant;

a compressing element operable to compress the refrigerant, the compressing element being lubricated by the lubricant;

a motor element operable to drive the compressing element to operate at a variable operation frequency;

20 a driving section for driving the motor element; and

a controlling section for controlling the driving section, the controlling section being operable

(a) to allow the compressing element to start operating,

(b) to allow the compressing element to operate at a
25 first frequency for a first period of time just after said (a) to allow the compressing element to start operating,

(c) to allow the compressing element to operate at a

second frequency lower than the first frequency for a second period of time longer than the first period just after said (b) to allow the compressing element at the first frequency for the first period, and

(d) to allow the compressing element to operate at an
5 ordinary operation after said (c) to allow the compressing element to operate at the second frequency for the second period.

26. The compressor of claim 25, wherein the controlling section is operable to control the driving section, the controlling section being operable

10 (e) to allow the compressing element to operate at a third frequency higher than the second frequency for a third period of time shorter than the second period just after said (c) to allow the compressing element to operate at the second frequency for the second period, and

(f) to allow the compressing element at a fourth frequency lower
15 than the first frequency and the third frequency for a fourth period of time longer than the first period and the third period just after said (e) to allow the compressing element to operate at the third frequency for the third period.

20 27. The compressor of claim 26, wherein the first frequency is equal to the third frequency.

28. The compressor of claim 26, wherein the second frequency is equal to the fourth frequency.

25

29. The compressor of claim 26, wherein the first period is equal to the third period.

30. The compressor of claim 26, wherein the second period is equal to the fourth period.

5 31. The compressor of claim 26, wherein the fourth period is shorter than the second period.

32. The compressor of claim 26, wherein the third frequency is higher than the first frequency.

10

33. The compressor of claim 25, further comprising a suction inlet for sucking the refrigerant, the suction inlet opening in the airtight container.

15

34. The compressor of claim 25, wherein the motor element includes
a rotor having a permanent magnet, and
a stator having a core including
a plurality of teeth, and
a wire wound on the plurality of teeth.

20

35. The compressor of claim 25, wherein the refrigerant is hydrocarbon refrigerant excluding chlorine and fluorine, and the lubricant and the refrigerant are mutually soluble with each other.

25

36. A refrigerating device comprising:
a compressor as defined in claim 25; and
a refrigerating cycle through which the refrigerant circulates, the refrigerating cycle being coupled to the compressor, the refrigerating cycle

including a condenser , a decompressor, and an evaporator.

37. The refrigerating device of claim 37, wherein a time when the compressor starts to operate is a first time after a defrosting operation.

1/14

Fig. 1

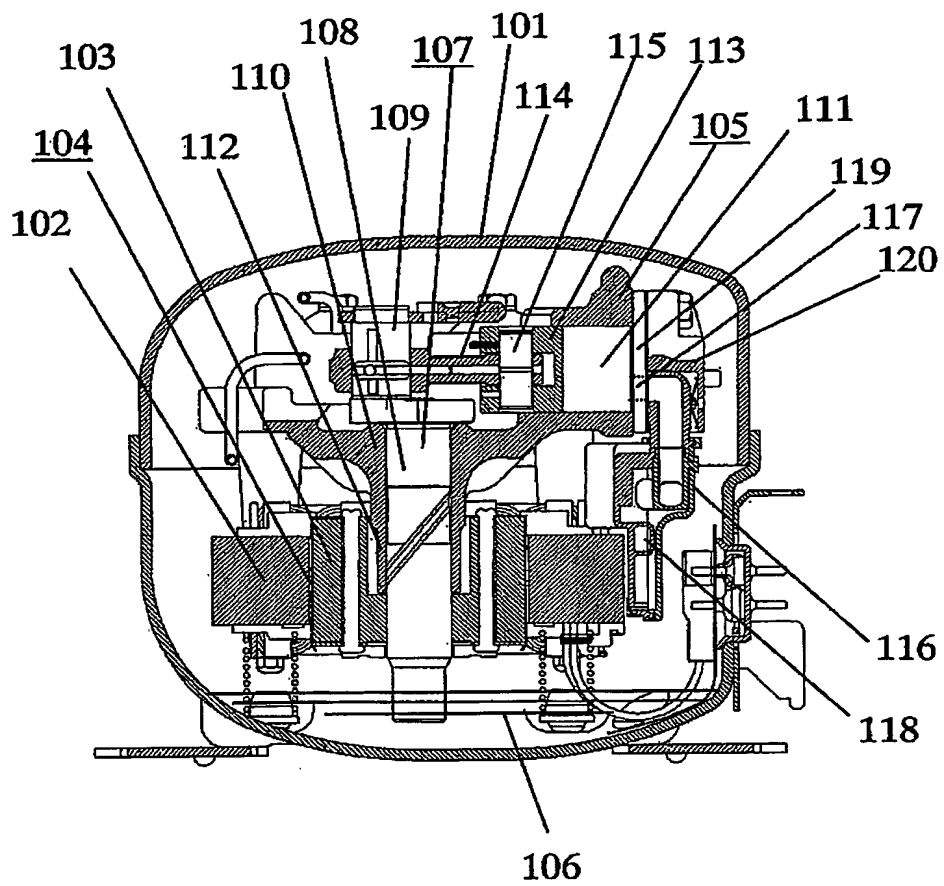


Fig. 2

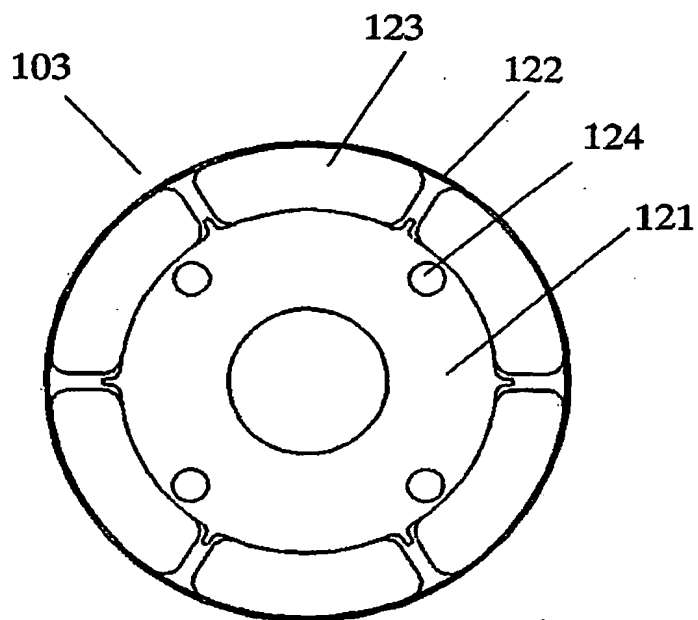


Fig. 3

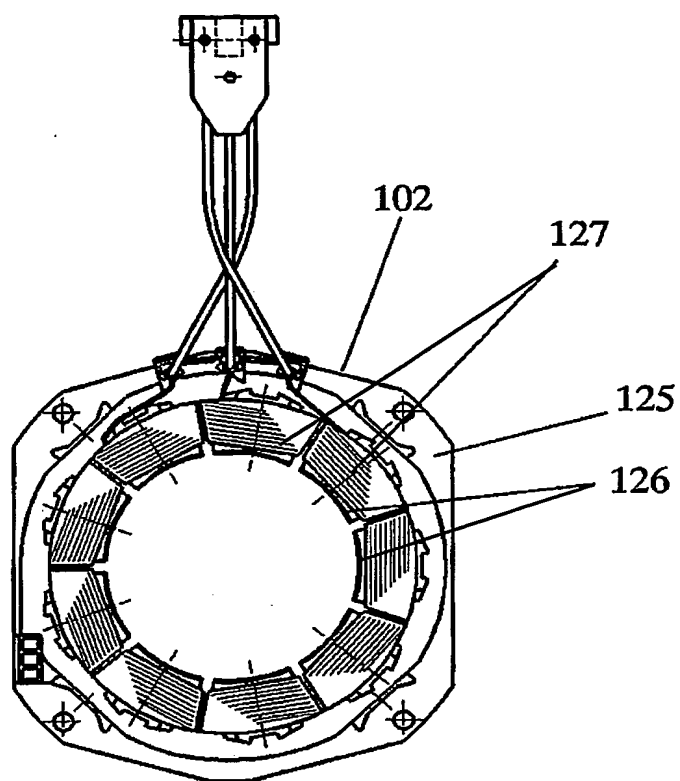


Fig. 4

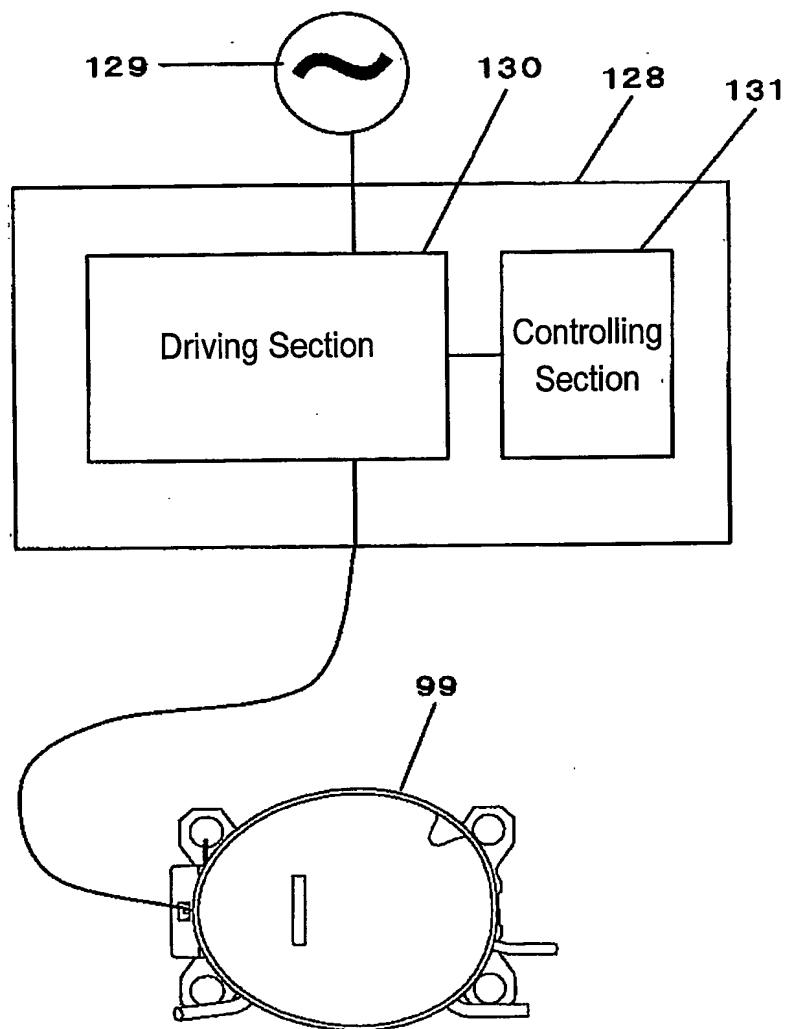


Fig. 5

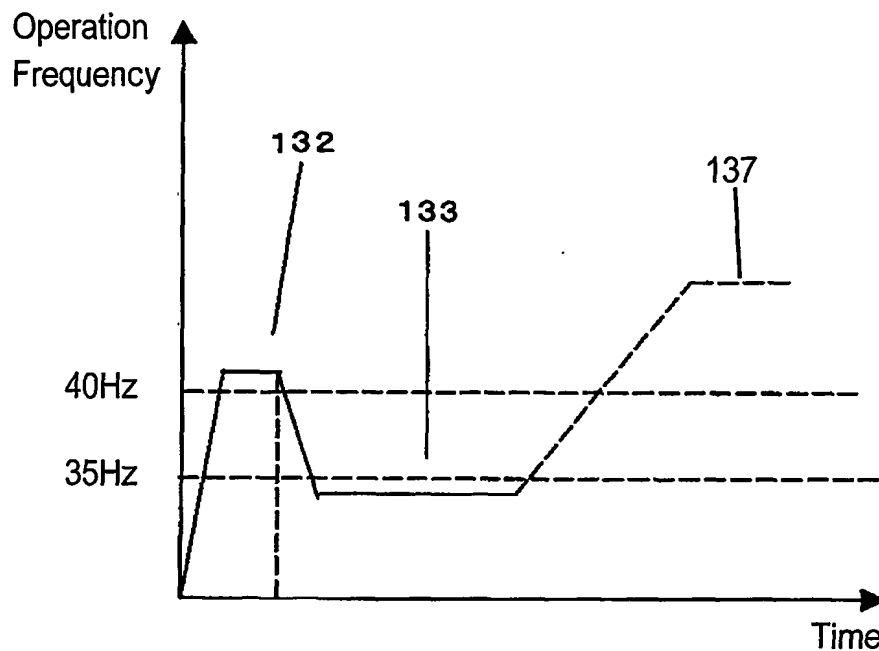


Fig. 6


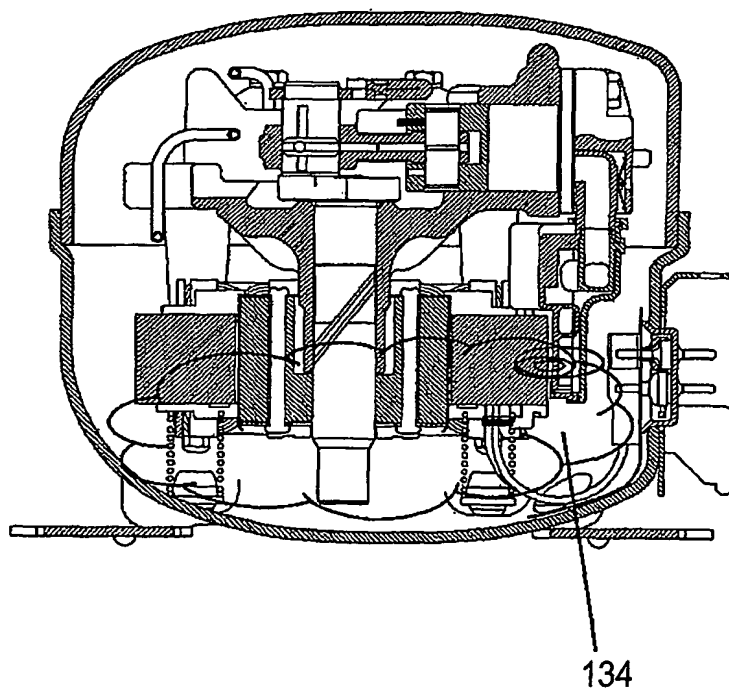


Fig. 7

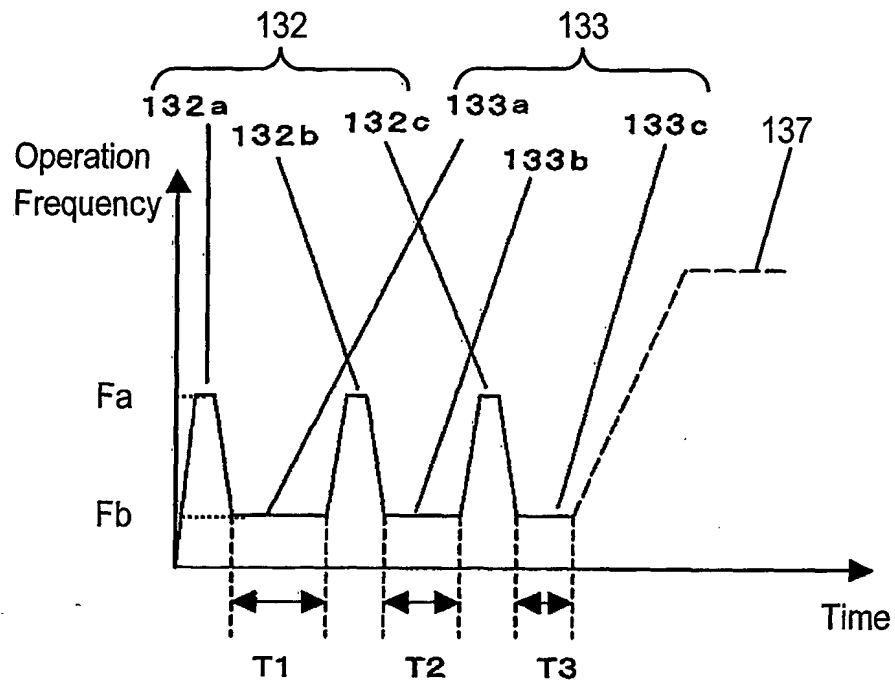

7/14

Fig. 8


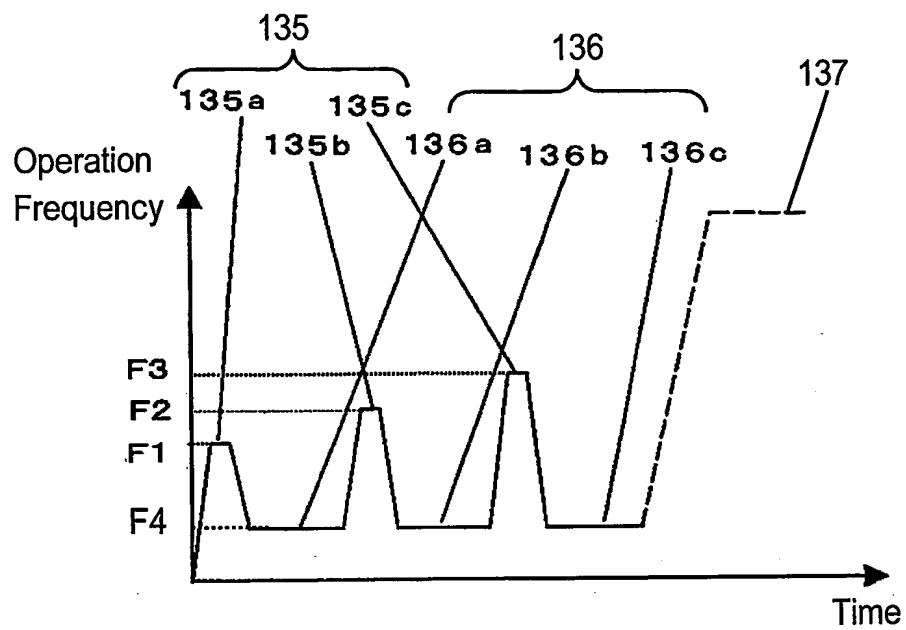


Fig. 9A

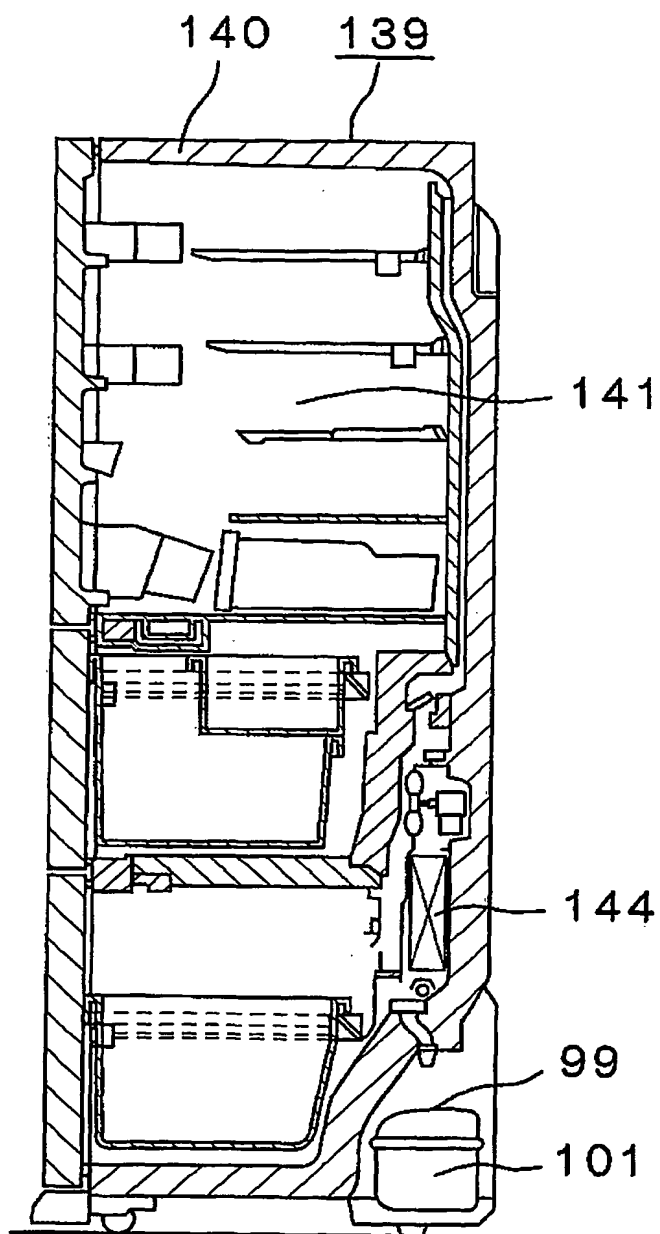

9/14

Fig. 9B


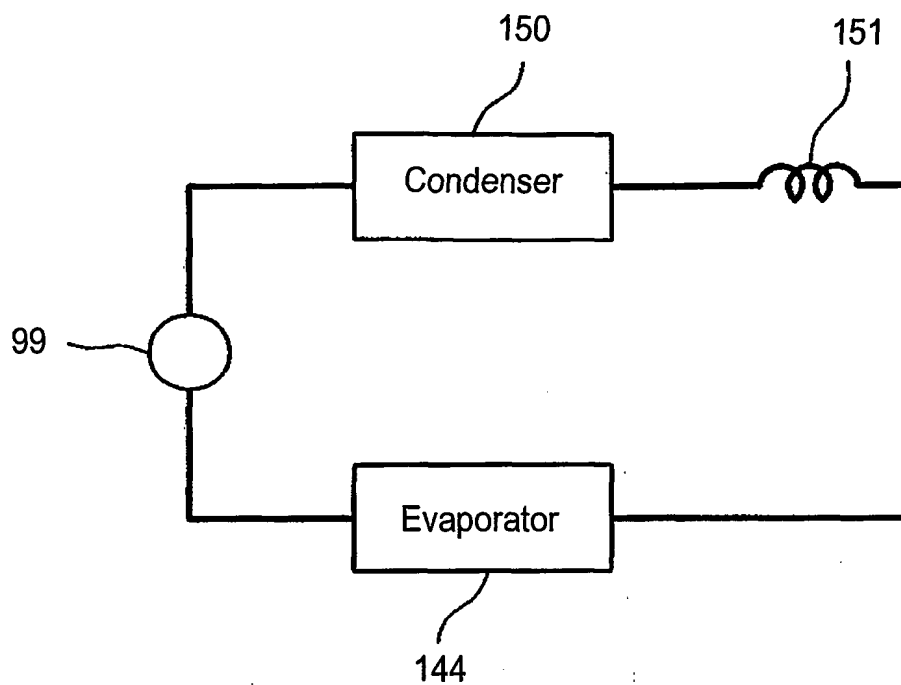


Fig. 10

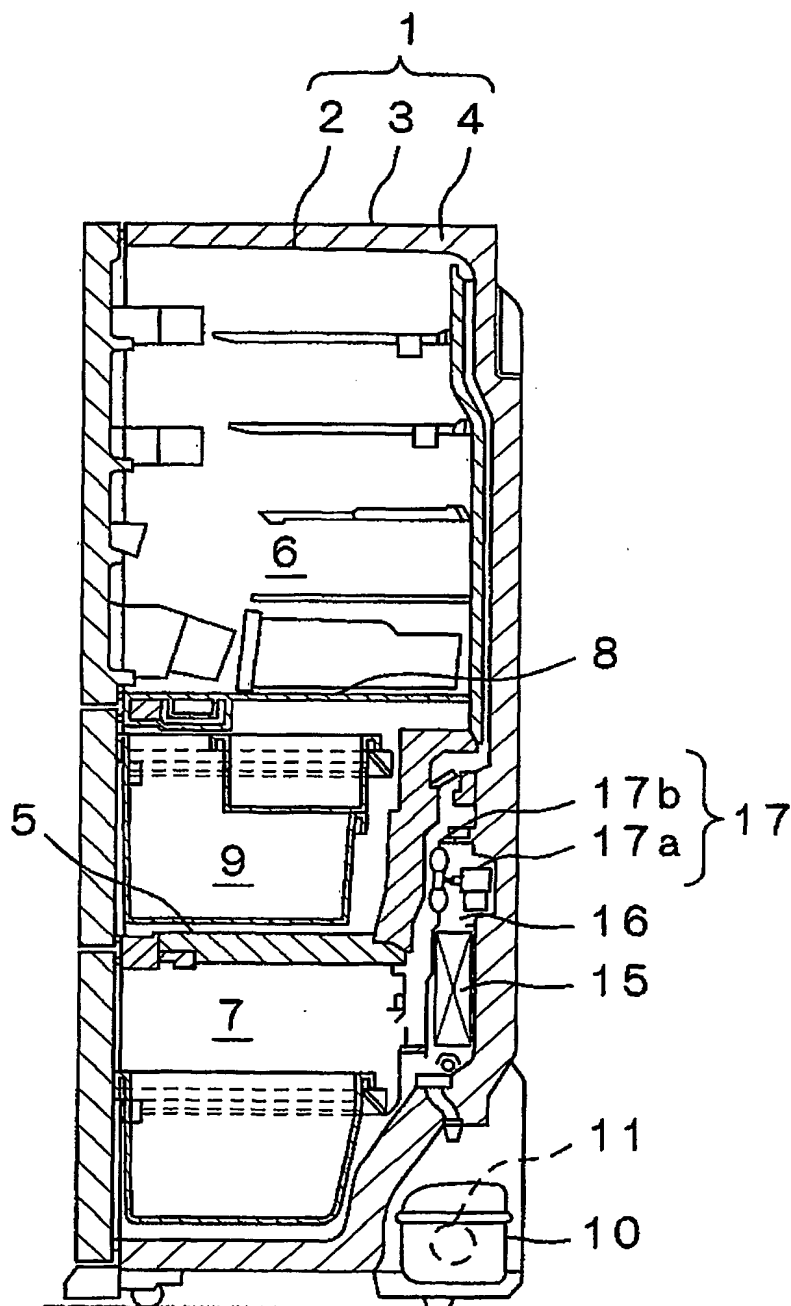

11/14

Fig. 11

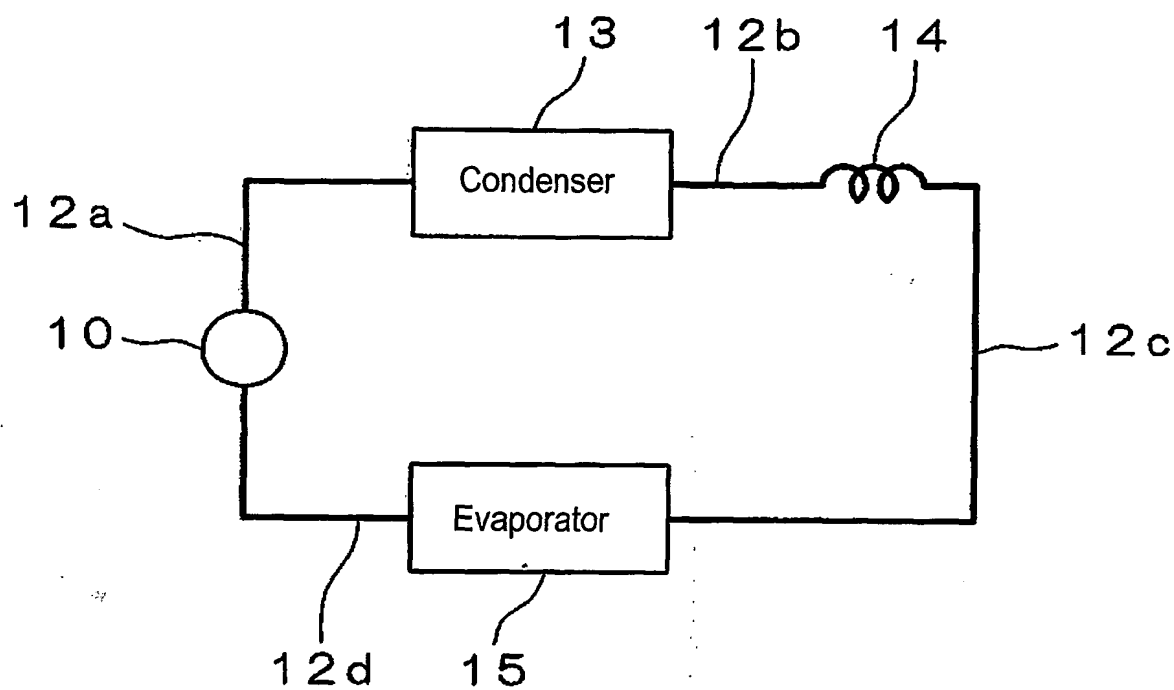


Fig. 12


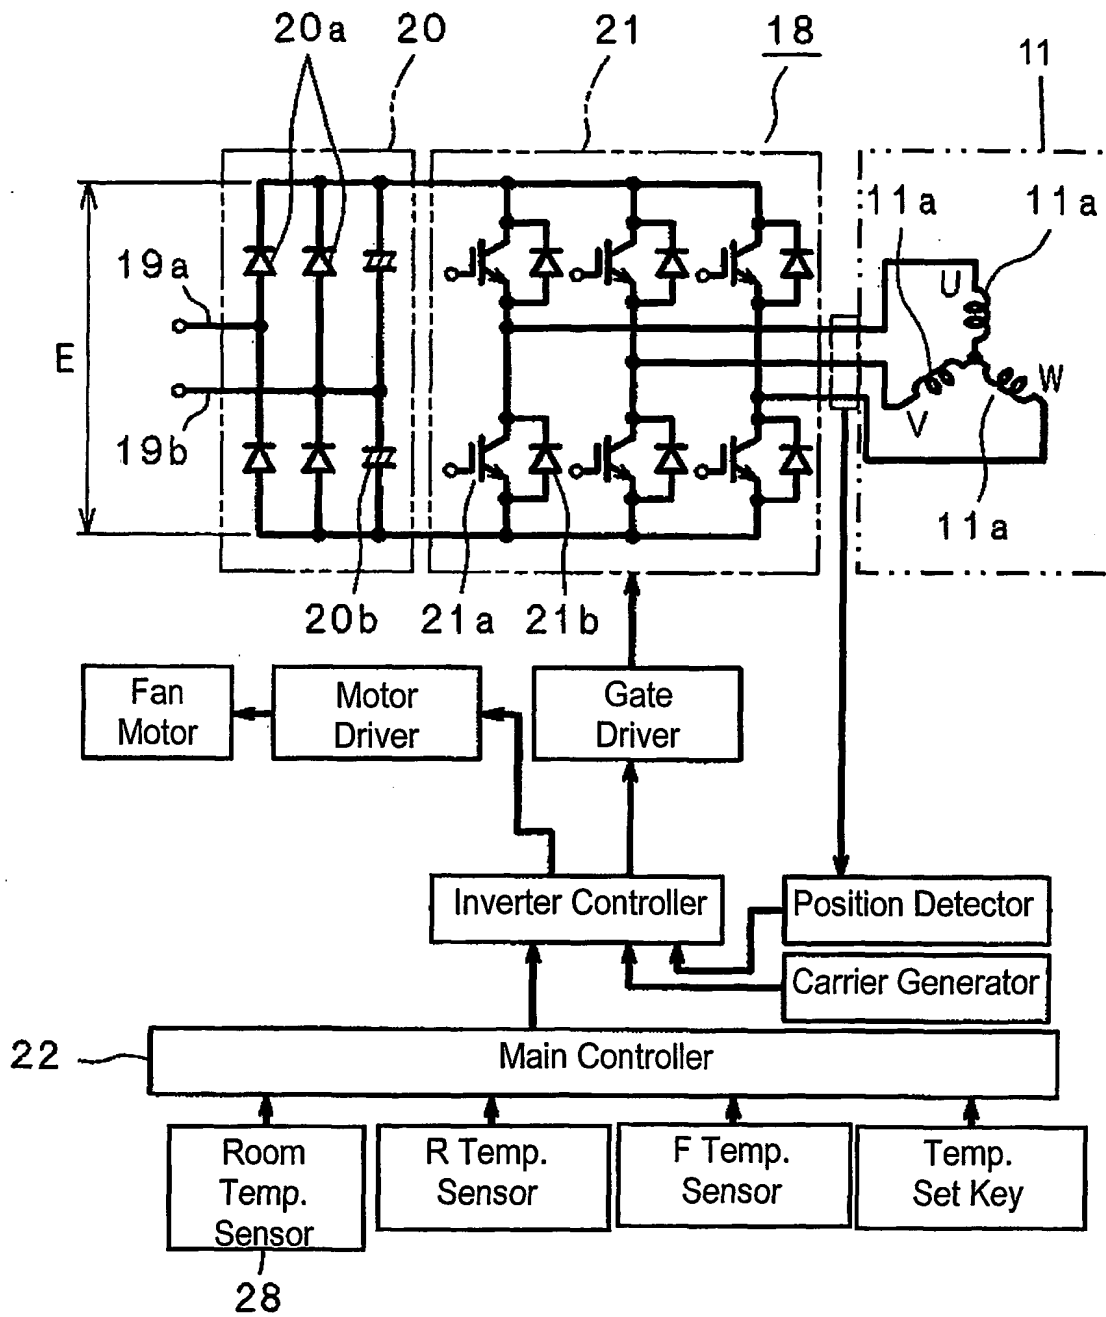


Fig. 13

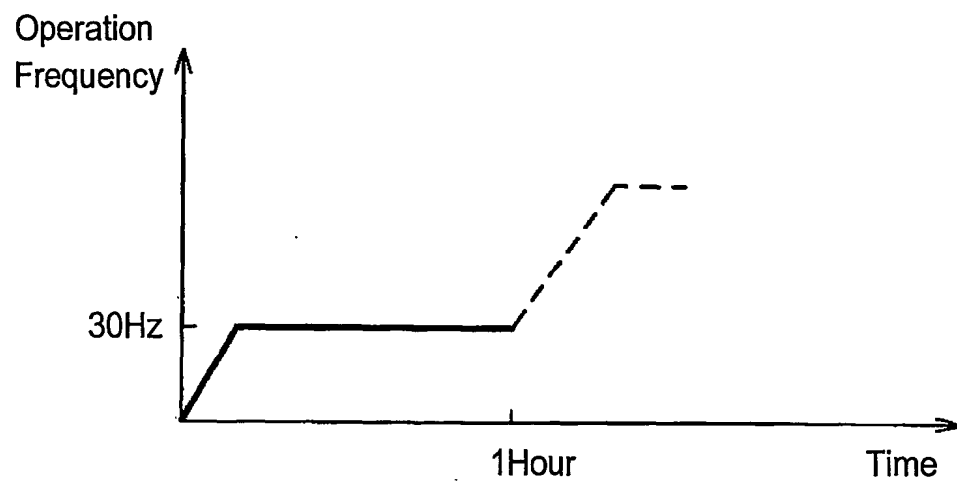

14/14

Reference numerals

99	Compressor
101	Airtight Container
102	Stator
103	Rotator
104	Motor Element
105	Compressing Element
106	Lubricant
118	Inlet
126	Tooth
127	Coil Wire
128	Controller
129	Power Supply
130	Driving Section
131	Controlling Section
139	Refrigerating Device
144	Evaporator
150	Condenser
151	Decompressor

INTERNATIONAL SEARCH REPORT

Rec'd PTO

13 DEC 2004

Int'l Application No

PC 004/007297

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 F25B49/02 F04B49/06 F04B39/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F25B F04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 014, no. 152 (M-0953), 23 March 1990 (1990-03-23) -& JP 02 013748 A (TOSHIBA CORP; OTHERS: 01), 18 January 1990 (1990-01-18) abstract	1-3, 16-18
Y		8, 10, 12-15, 24-27, 33-37
A		4-7, 9, 11, 19-23, 28-32

	-/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Z document member of the same patent family

Date of the actual completion of the international search

9 September 2004

Date of mailing of the international search report

28/09/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

De Graaf, J.D.

INTERNATIONAL SEARCH REPORT

International Application No
P 2004/007297

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	PATENT ABSTRACTS OF JAPAN vol. 1999, no. 14, 22 December 1999 (1999-12-22) -& JP 11 241846 A (TOSHIBA CORP), 7 September 1999 (1999-09-07) abstract ---	8, 10, 12-14
Y	EP 0 940 641 A (MATSUSHITA ELECTRIC IND CO LTD) 8 September 1999 (1999-09-08) the whole document ---	15, 24-27, 33-37
X	PATENT ABSTRACTS OF JAPAN vol. 2002, no. 07, 3 July 2002 (2002-07-03) -& JP 2002 081770 A (DAIKIN IND LTD), 22 March 2002 (2002-03-22) Fig. 3, line with squares indicates compressor speed (see par. 17). abstract; figure 3 ---	1, 16, 25, 36, 37
X	PATENT ABSTRACTS OF JAPAN vol. 1999, no. 14, 22 December 1999 (1999-12-22) -& JP 11 248228 A (MATSUSHITA ELECTRIC IND CO LTD), 14 September 1999 (1999-09-14) abstract; figure 12 ---	1, 16, 25, 36
X	US 6 206 643 B1 (JEONG WON-BAE) 27 March 2001 (2001-03-27) column 3, line 39 -column 4, line 3; figures 5,6 ---	1, 16, 25, 36
A	PATENT ABSTRACTS OF JAPAN vol. 009, no. 164 (M-395), 10 July 1985 (1985-07-10) -& JP 60 036794 A (HITACHI SEISAKUSHO KK), 25 February 1985 (1985-02-25) abstract ---	1
A	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 02, 29 February 2000 (2000-02-29) -& JP 11 311186 A (TOSHIBA CORP), 9 November 1999 (1999-11-09) abstract; figure 1 ---	1
A	US 5 074 120 A (KITAMOTO MANABU) 24 December 1991 (1991-12-24) figure 8 ---	1
A	EP 0 622 445 A (MITSUBISHI ELECTRIC CORP) 2 November 1994 (1994-11-02) abstract ---	15
	--- -/--	

INTERNATIONAL SEARCH REPORT

International Application No

PC JP 04/007297

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 323 619 A (KIM TAE DUK) 28 June 1994 (1994-06-28) ----	
A	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 12, 3 January 2001 (2001-01-03) -& JP 2000 266444 A (MATSUSHITA REFRIG CO LTD), 29 September 2000 (2000-09-29) abstract ----	
A	PATENT ABSTRACTS OF JAPAN vol. 1999, no. 13, 30 November 1999 (1999-11-30) -& JP 11 230627 A (MATSUSHITA ELECTRIC IND CO LTD), 27 August 1999 (1999-08-27) abstract -----	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

P JP 2000/007297

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 02013748	A	18-01-1990	JP 2567042 B2	25-12-1996
JP 11241846	A	07-09-1999	CN 1229899 A ,B	29-09-1999
EP 0940641	A	08-09-1999	JP 11248271 A	14-09-1999
			CN 1227907 A ,B	08-09-1999
			DE 69907546 D1	12-06-2003
			DE 69907546 T2	18-03-2004
			EP 0940641 A2	08-09-1999
			ES 2198802 T3	01-02-2004
			US 6044660 A	04-04-2000
			US 6216476 B1	17-04-2001
JP 2002081770	A	22-03-2002	NONE	
JP 11248228 0	A		NONE	
US 6206643	B1	27-03-2001	KR 2000002104 A	15-01-2000
			BR 9915628 A	27-11-2001
			IT MI991351 A1	18-12-2000
			JP 2000104665 A	11-04-2000
JP 60036794 0	A		NONE	
JP 11311186 0	A		NONE	
US 5074120	A	24-12-1991	JP 3007853 A	16-01-1991
			AU 612296 B2	04-07-1991
			AU 5622890 A	06-12-1990
			GB 2235550 A ,B	06-03-1991
			KR 9305662 B1	24-06-1993
EP 0622445	A	02-11-1994	BR 9401605 A	22-11-1994
			CN 1095152 A ,B	16-11-1994
			DE 69420611 D1	21-10-1999
			DE 69420611 T2	31-05-2000
			EP 0622445 A1	02-11-1994
			EP 0844300 A2	27-05-1998
			EP 0846925 A2	10-06-1998
			EP 0846926 A2	10-06-1998
			EP 0846751 A2	10-06-1998
			EP 0852323 A2	08-07-1998
			ES 2138037 T3	01-01-2000
			JP 2882279 B2	12-04-1999
			JP 7208819 A	11-08-1995
			KR 137844 B1	01-07-1998
			SG 67329 A1	21-09-1999
			US 5531080 A	02-07-1996
US 5323619	A	28-06-1994	KR 133053 B1	21-04-1998
			JP 6101925 A	12-04-1994
JP 2000266444	A	29-09-2000	NONE	
JP 11230627 4	A		NONE	